


技术指标

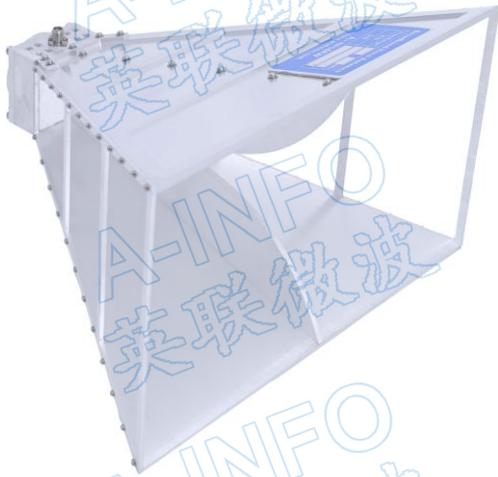


频率(GHz)	0.8 – 30.0
增益(dBi)	12 典型值
极化方式	线极化
3dB 波束宽度(°)	E 面: 102 – 25
	H 面: 90 – 19
交叉极化隔离(dB)	25 典型值
驻波	1.50:1 典型值
连接器	2.92mm-50K
	2.4mm-50K
承受功率(瓦 连续波)	2.92mm-50K: 20 最大值
	2.4mm-50K: 10 最大值
材料	铝
尺寸(mm)	244.5 x 144.3 x 201
净重(Kg)	约 0.61

外形图 (尺寸: mm)


2.92mm-50K 输出 (型号: LB-8300-KF)

如需要 2.4mm-50K 输出的外形图, 请联系英联微波.

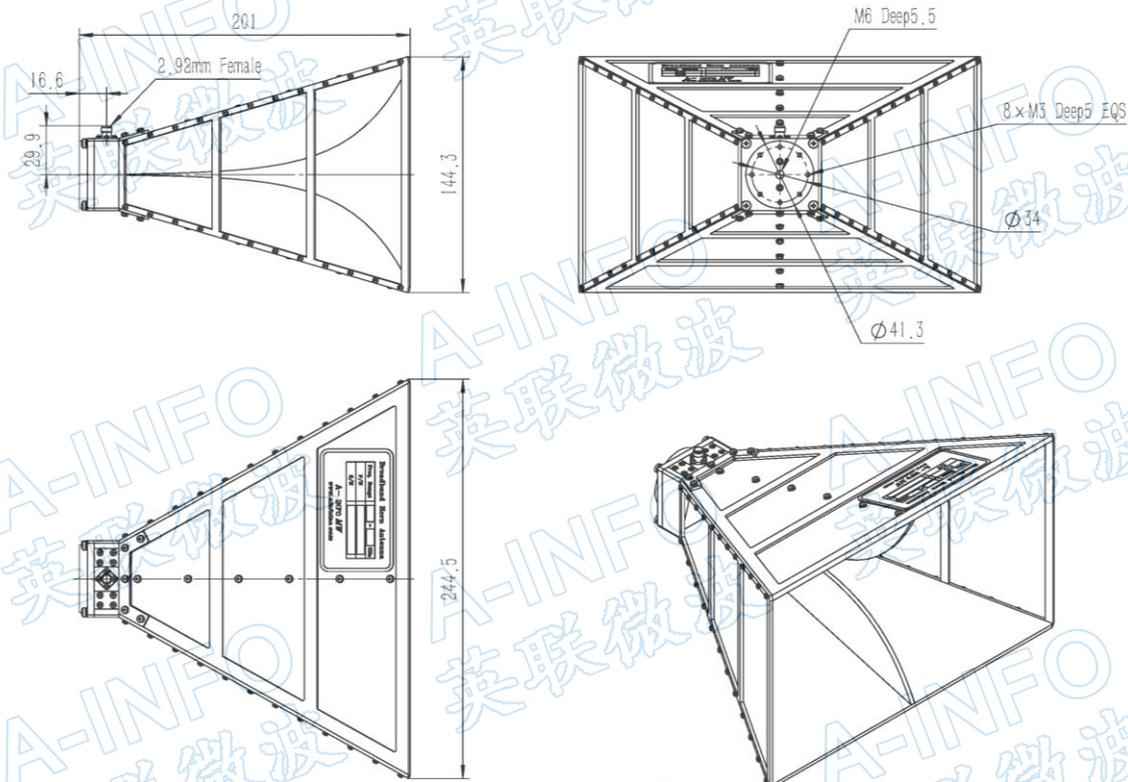



2.92mm-50K 输出, 配 L 形背夹 (配件, 型号: LB-20180-L)

如需要 2.4mm-50K 输出的外形图, 请联系英联微波.

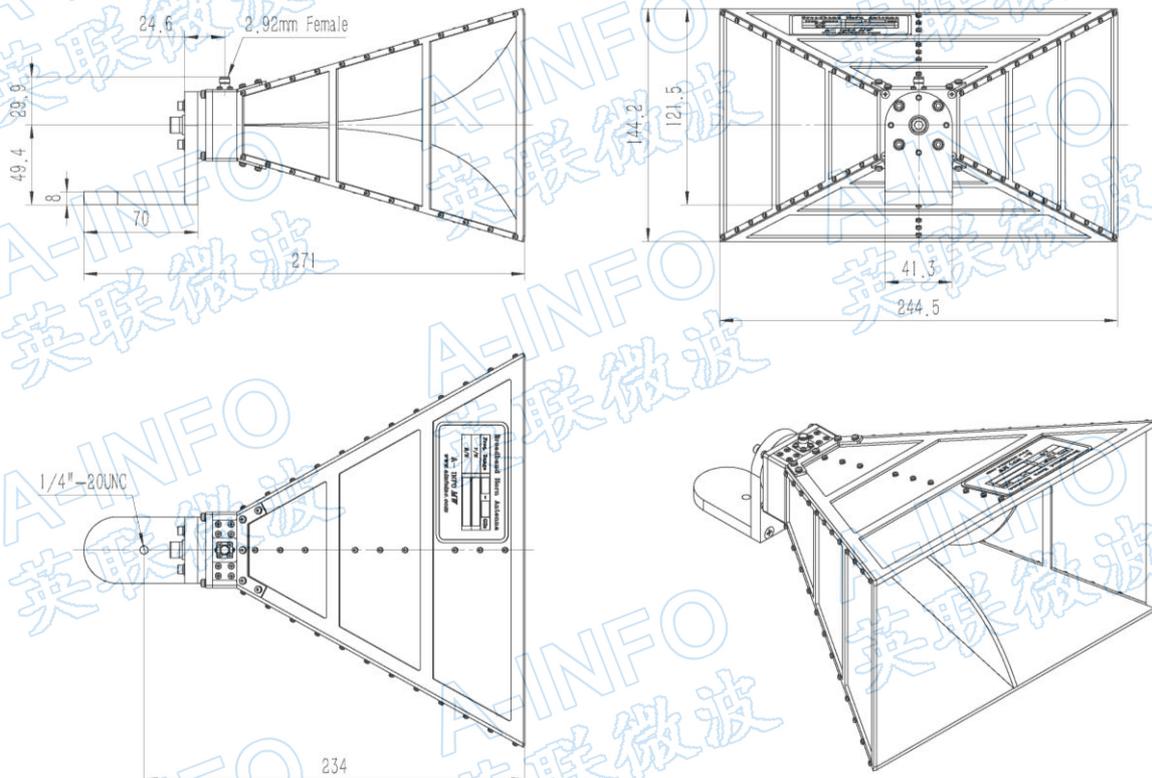


测试结果


1. 增益 & 天线系数

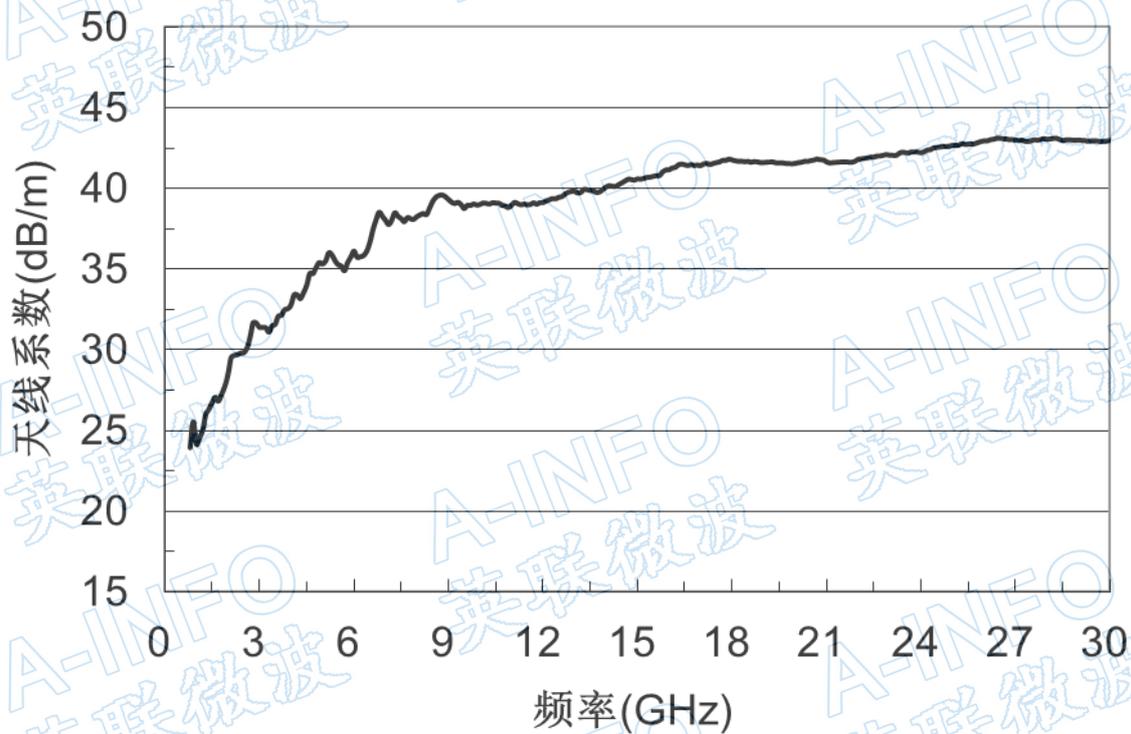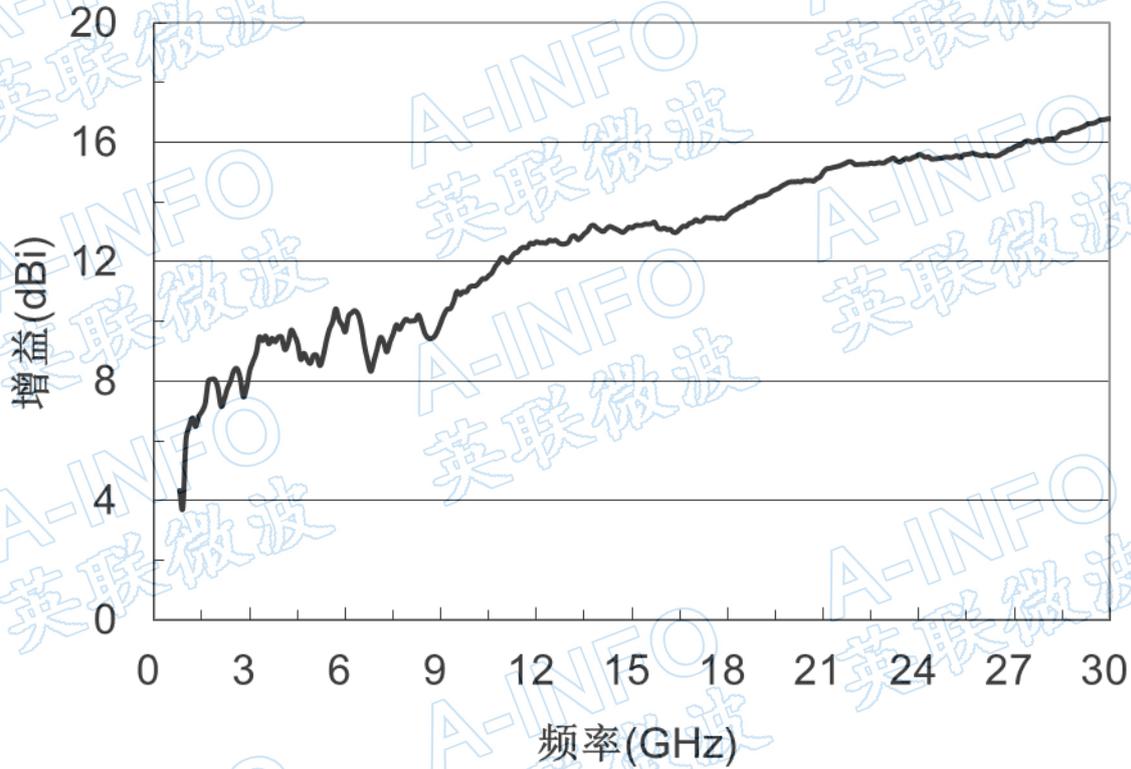

2. 交叉极化隔离

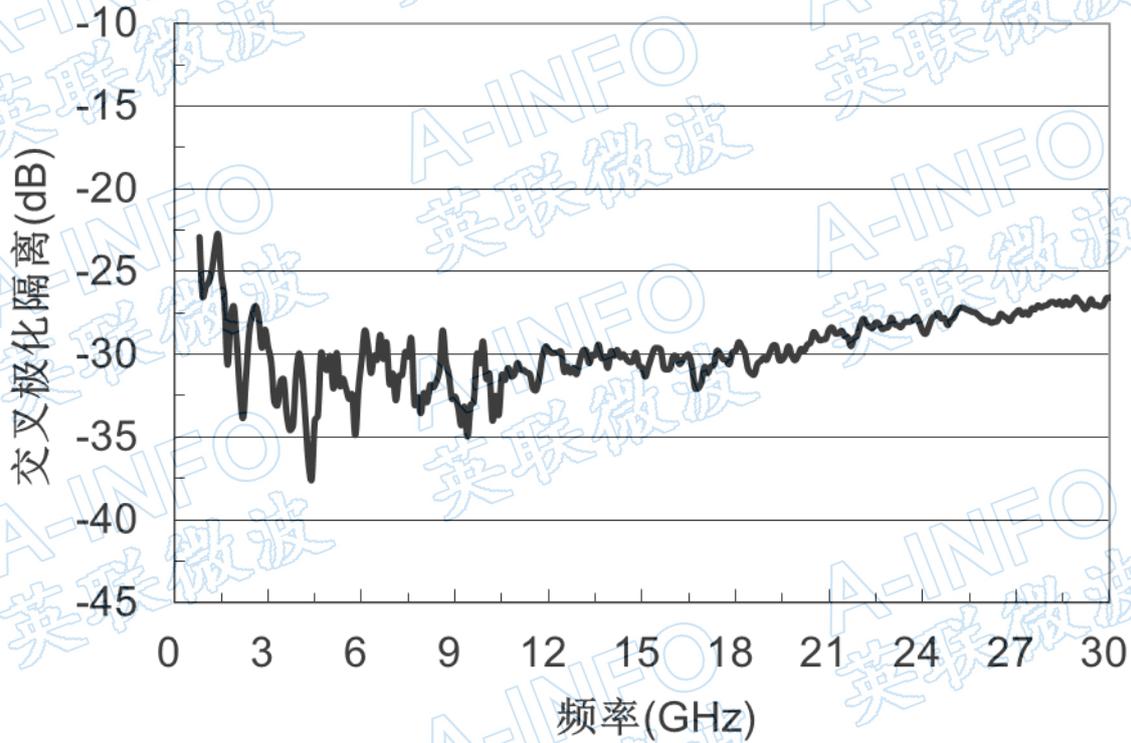

3. 驻波

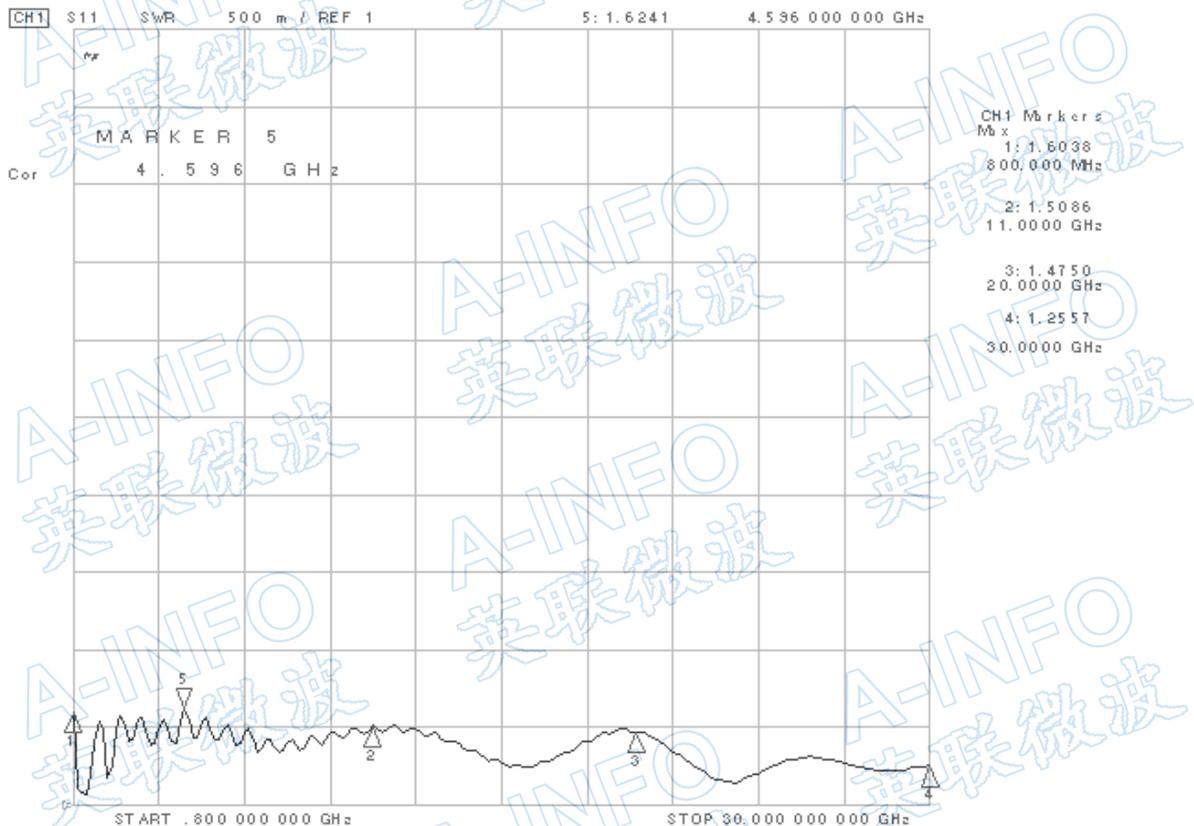

4. 方向图

