

QPD3-134-3700-30-N

3-Way, 134~3700MHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	134~3700MHz
Insertion Loss:	3.8dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	0.9dB
Phase Balance:	±10°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical


Size ^{*1} :	280*68*20mm 11.024*2.676*0.787in
Connectors:	N Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

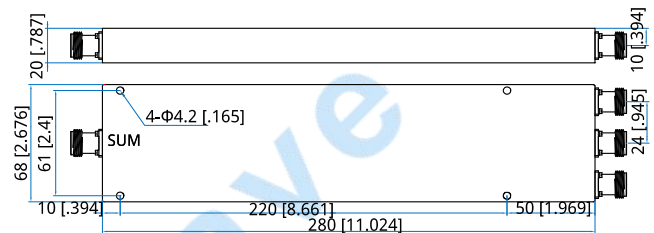

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD3-134-3700-30-N

Customization is available upon request.